


Lifting Points, screwed type

The X-TREME Lifting Point **XL** TWN 1830

is equipped with a ball bearing system. It has a special wide coupling link which enables an easy slinging of bigger hooks. It is particularly well suited for loads that have to be turned or flipped. The octagonal shap of the subpart enables an easy assembling with a common hand tool. 100% Magnetic crack tested. According to the principles of the BG GS-0A-15-04

Like the TITAN Lifting Point the X-TREME Lifting Point is capable to lift with the nominal working load limit in all directions. The X-TREME Lifting Point is not suitable for permanent rotations under load.


Finish: RAL 5002, electro galvanized and yellow chromated

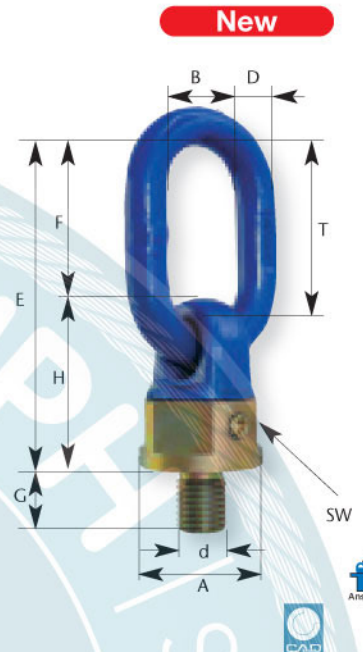

Description	Working Load (WLL)			Screw Size [d x G]	Article-No.	Dimensions [mm]							Weight app. [kg]	
	Vertical Y [t]	Extreme Z [t]	Hinged X [t]			E	F	D	T	B	A	SW		H
X-TRE 0,45	0,9	0,45	0,6	M10 x 15	F34306	101	46,5	13	55	33	39	36	54,5	0,50
X-TRE 0,60	1,2	0,60	0,7	M12 x 18	F34307	101	46,5	13	55	33	39	36	54,5	0,50
X-TRE 1,40	2,8	1,4	1,7	M16 x 20	F34300	101	46,5	13	55	33	39	36	54,5	0,50
X-TRE 2,50	5,3	2,5	2,8	M20 x 25	F34310	121	58,5	16	70	34	50	46	62,5	0,90
	5,3	2,5	2,8	M20 x 50	F34312	121	58,5	16	70	34	50	46	62,5	1,00
X-TRE 3,50	7	3,5	4	M24 x 30	F34320	148	72	18	85	40	57	50	76	1,50
	7	3,5	4	M24 x 90	F34321	148	72	18	85	40	57	50	76	1,70
X-TRE 5,30	10	5,3	6,3	M30 x 40	F34330	170,5	83	22	100	50	73	65	87,5	2,70
X-TRE 8,00	15	8	9,5	M36 x 50	F34340	179	81	22	100	50	83	70	98	3,60
	15	8	9,5	M36 x 63	F34341	179	81	22	100	50	83	70	98	3,80
	15	8	9,5	M36 x 70	F34343	179	81	22	100	50	83	70	98	3,90
X-TRE 10,00	18	10	12,5	M42 x 60	F34350	244	116	32	140	70	106	95	128	8,30
X-TRE 12,50	18	12,5	15	M45 x 65	F34353	244	116	32	140	70	106	95	128	8,40
	20	12,5	16	M48 x 68	F34355	244	116	32	140	70	106	95	128	8,60
X-TRE 17,00	28	17	22	M56 x 78	F34360	251	116	32	140	70	116	95	135	10,00

Variable screw lengths up to 3 x d available at thread diameter M20, M24, M30, M36.

*Load Direction hinged

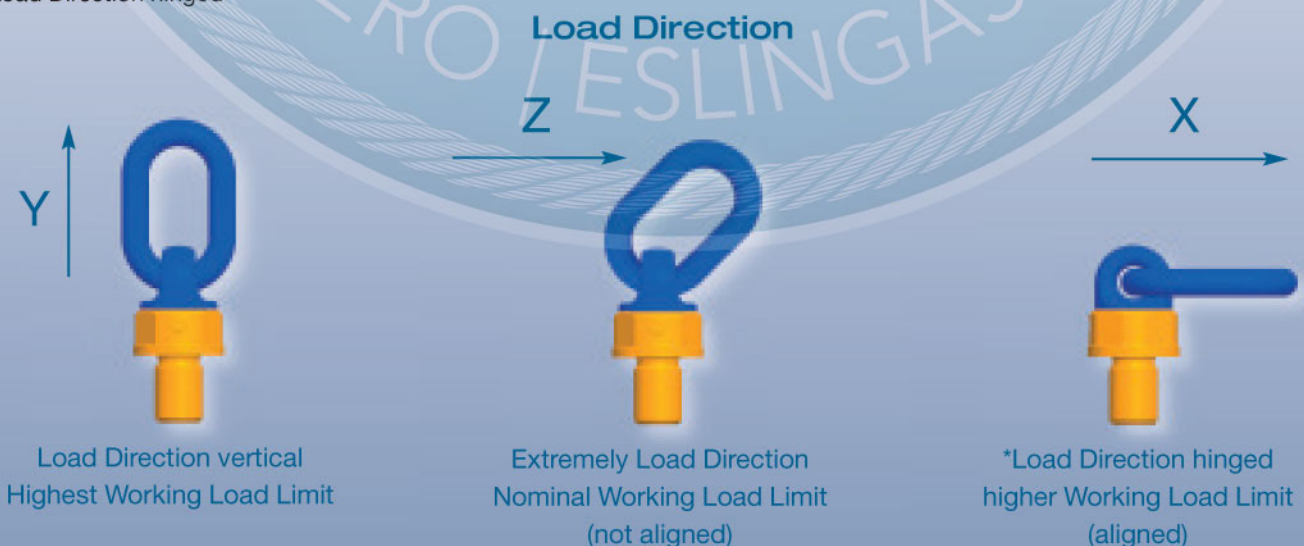

Lifting Points, screwed type

New


XS-Lifting Point TWN 1890

A piece of individualism combined with technology for more safety.

Our new XS-Lifting Point TWN 1890 has a 100% nominal working load limit in all tensile directions and it can also be rotated by 360° and swivelled by 180°. Our engineers designed a Lifting Point which guarantees a fast and uncomplicated mounting and removal using a standard open-end spanner. The extrawide bow enables load hooks of a large nominal size to be used for slinging without any difficulty.

The XS-Lifting Point is especially designed for the exchange of the screws and therefore screw lengths.

Finish: RAL 5002, electro galvanized and yellow chromated

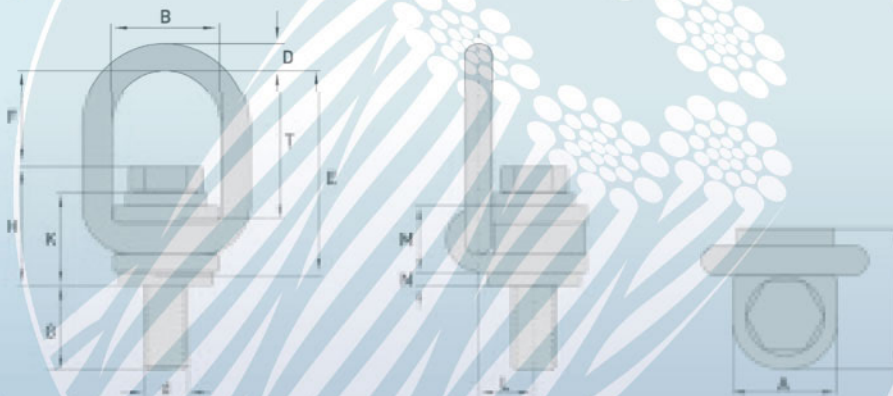

Screw Size [d]	Article-No.	Working Load Limit [t max]	Thread Length [mm] G	Dimensions [mm]											
				E	F	D	T	B	A	C	H	K	L	M	N
M10*	F35243	0,50	17	96	51,5	13	70	50	48	64	44,5	38,0	25,0	30,0	5
M12*	F35244	0,80	22	96	50,5	13	70	50	48	64	45,5	38,0	25,0	30,0	5
M16	F35245	1,70	30	97	46,5	13	70	50	48	64	50,0	40,0	25,0	30,0	5
M20	F35246	2,50	38	98	43,0	13	70	50	48	64	54,5	42,0	25,0	30,0	6
M24	F35247	4,00	41	134	70,0	16	102	58	50	71	64,0	50,0	28,0	38,5	6
M27*	F35248	5,00	50	145	67,5	18	105	75	72	92	77,5	60,5	35,0	44,5	12
M30*	F35249	6,00	58	146	64,5	18	105	75	72	92	81,5	62,5	35,0	44,5	12
M36*	F35250	8,00	70	199	96,0	32	140	100	95	148	103,0	80,5	50,0	60,5	15
M42*	F35251	10,00	78	200	91,5	32	140	100	95	148	108,5	82,5	50,0	60,5	15
M48*	F35252	12,00	76	201	86,5	32	140	100	95	148	114,5	84,5	50,0	60,5	15

* in development